

:
: 1

...

ss	City	Country	Web	Email	Fax	Mobil	WPhon	HPhon	LName	FName	Num
)	A(15)	A(15)	A(40)	A(40)	A(15)	A(15)	A(15)	A(15)	A(15)	A(15)	+

Num

.

:

Data C MyPhon 1

) Data Data

. Paradox

BDE C:\MyPhon\Data Myphon Alias 2

. Database Desktop Administrator

Paradox Database Desktop 3

:

Define Table properties Secondary Indexes

Ok Lname Fname

. FNameIndex

.... FName Lname Define

. LNameIndex

MyPhon Alias Phonebook 4

. C:\MyPhon\Data

:

: 2

)

(

)

(

:

)

:

. (


:

Memo

:

Memo

Alpha

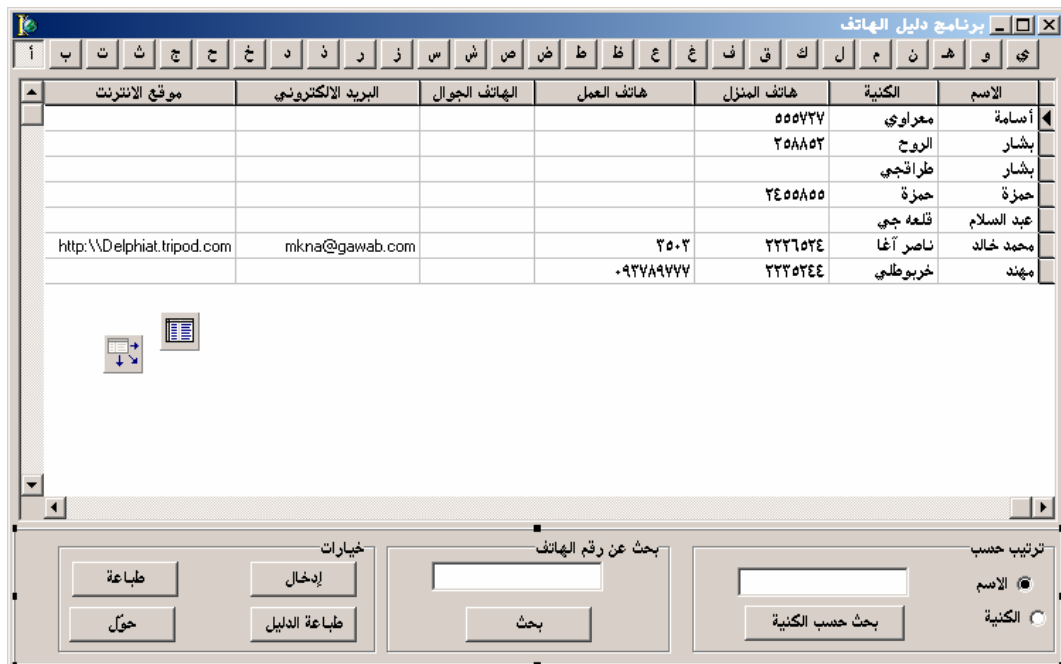

:

: 1

bdRightToLeft	BiDiMode
	Caption
470	Hieght
750	Width
poScreenCenter	Position

: Win32 TabControl 2

alTop	Align
True	MultiLine
tsButtons	Style
	Tabs
True	HotTrack

: Standard Panel 3

alClient	Align
bvLowered	BevelInner
bvRaised	BevelOuter
"	Caption

: Table 4

MyPhone	DatabaseName
Phonebook	TableName
FnameIndex	IndexName
True	Active
Num	DisplayLabel

: Tabcontrol : DataSource 5

Table1	Dataset
--------	---------

: DbGrid 6

alClient	Align
DataSource1	DataSource
+ Titel	taCenter Aligment

: Panel : GroupBox 7

	Caption
--	---------

GroupBox1 : RadioButton1 8

	Caption
True	Checked
RBTName	Name

GroupBox1 : RadioButton2 9

	Caption
RBTLname	Name

: GroupBox1 : Edit1 10

"	Text
---	------

GroupBox1 : Button 11

	Caption
BtnSearch	Name

:

: RBTName

table1.IndexName := 'FnameIndex';

btnSearch.Caption := ' ';

: RBTLname

table1.IndexName := 'LnameIndex';

btnSearch.Caption := ' ';

Tabcontrol

Tabcontrol1 OnCahnge

:

if RBTName.Checked then

table1.Filter := 'fname = ' + quotedstr(tabcontrol1.Tabs[tabcontrol1.tabindex]+ '*') else

table1.Filter := 'Lname = ' + quotedstr(tabcontrol1.Tabs[tabcontrol1.tabindex]+ '*')

...

:

()

Edit1

: BtnSearch

Filter

```
table1.Filtered := false;
table1.FindNearest([edit1.text]);
```

.....

:

WPhon

HPhon

Mobil

:

: Panel

: GroupBox

1

	Caption
--	---------

Edit2 2

"	Text
---	------

: Button 3

	Caption
BtnPhSearch	Name

:

```
Table1.Filtered := false;
if not Table1.Locate('HPhon',edit2.text,[]) then
if not Table1.Locate('WPhon',edit2.text,[]) then
if not Table1.Locate('Mobil',edit2.text,[]) then
showmessage(' ');
```

....

Main.pas

C:\MyPhon

:

. MyPhone



:

: Panel

: GroupBox

	Caption
--	---------

Caption Button

Data control

:

Memo

DBGrid

. (ReadOnly DBGrid) DBGrid

:

bdRightToLeft	BiDiMode
	Caption
poScreenCenter	Position
DataEnter	Name

Table1

Uses

Main

:

. DataEnterU

DBNavigator

Label

DBEdit

:



(Label

)

. Form1.DataSource1

DataSource

. Label

DataField

DBEdit

:

DataEnter.ShowModal ;

DBGrid

DBGrid1

OnDbClick

DataEnter.ShowModal ;

:

QReport

:

: 7

QReport

Rave

:

7

QReport

Compponant → install package → add

. Delphi7

Bin

dclqrt60.bpl

:

Uses

Main

. Printform Name

Table1

:

Qreport

QuickRep

HasDetail HasColumnHeader : Band

True

. HasPagefooter HasPageHeader

. Form1.DataSource1

Dataset

"

" Caption


Page Header

QRlabel

:

QRlabel

Column Header

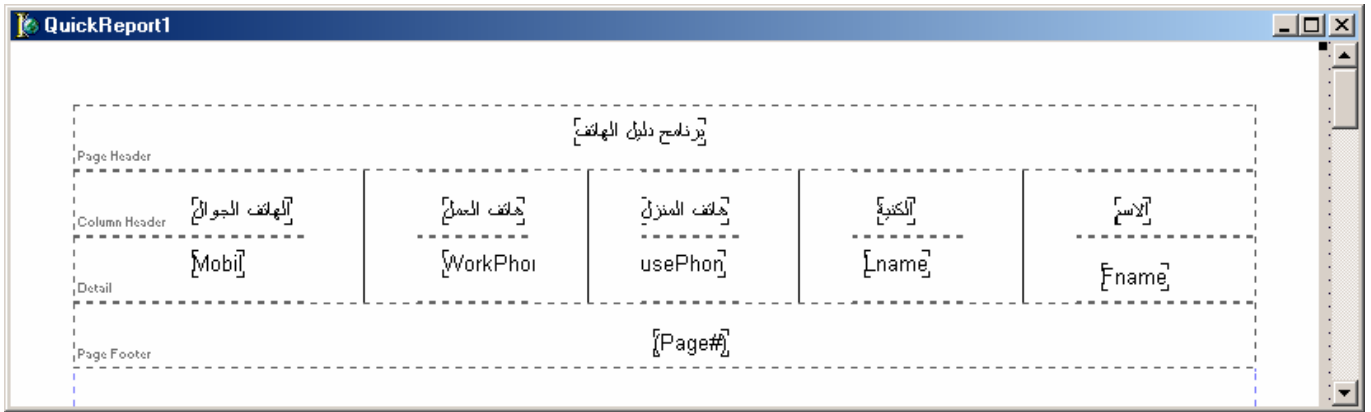

Dataset

QRDbText

Detail

... Page Number

data

QRSysData

Page Footer

. PrintUnit

Preview

QUickRep1

:

Printform.QuickRep1.Preview